

1. INTRODUCTION

This operation instruction manual conforms to the requirements of the 98/37/EEC Machine Directives and subsequent amendments.

In the light of this, special attention has been given to safety aspects and accident prevention in the work-place for each stage in the machine's "life". Information which could be of particular assistance to the operator has been highlighted.

The "Operating instructions" are an integral part of the machine and should be consulted before, during and after the start up of the machine and whenever else required. The content of these instructions should always be carefully observed.

The observance of the above is the only way to achieve the two fundamental aims of this manual:

- **Optimization of machine performance**
- **Prevent damage to the machine and injury to the operator**

The index of the chapters and the index of the drawings, diagrams and tables is contained in chapter 3 and can be used to help the location of specific information.

CAUTION : BEFORE INSTALLING THE MACHINE, READ THE OPERATING INSTRUCTIONS CAREFULLY
--

2. INFORMATION ABOUT MAINTENANCE ASSISTANCE

2.1 GUARANTEE

- MIVA S.a.s. products are guaranteed against material and manufacturing defects for a period of 12 months from the date of delivery or, if the machine is installed by MIVA employees, from the date of machine start up.
- The buyer is only entitled to the replacement of parts which are acknowledged as faulty: carriage and packing are at the buyer's expense. In the event of the above, the following information should be supplied:
 1. Date and number of purchasing document
 2. Machine model
 3. Serial number
 4. Code of any relevant drawings
- Requests for compensation for the inactivity of the machine will not be accepted.
- The guarantee does not cover uses which are not in line with these operating instructions which are an integral part of the machine. Nor is maintenance covered if the instructions supplied are not observed.
- The guarantee will not cover machines which have undergone unauthorized modifications.

Modification or tampering with the safety devices is strictly forbidden

3. INDEX

3.1 INDEX OF CHAPTERS

Chap. 1	Introduction
Chap. 2	Information about maintenance assistance
Chap. 3	Index of chapters, drawings, diagrams and tables
Chap. 4	Description of the machine Safety standards complied with during the design and construction of the machine Description of the machine and its components
Chap. 5	Main technical data
Chap. 6	Installation
Chap. 7	Start up and operation Devices and their location Tools supplied Operation Special safety checks General safety rules Measures to prevent residual risks
Chap. 8	Maintenance and repairs General safety measures Routine checks and maintenance Description of routine maintenance
Chap. 9	Information regarding environmental noise
Chap. 10	List of spare parts

3.2 INDEX OF DRAWINGS, DIAGRAMS AND TABLES

ENCL. TYPE	DESCRIPTION	ENCL No.	CHAP
Table	Choice of circular blade	1	7.3
Drawings	Overall Dimentions	1	6/7.1
Drawings	Electrical details - electrical installation	2	6
Drawings	Motor-blade block	2	6/7.3
Drawing	Machine assembly	3	7.3/8.3

4. DESCRIPTION OF THE MACHINE

4.1 SAFETY STANDARDS COMPLIED WITH DURING THE DESIGN AND CONSTRUCTION OF THE MACHINE

The machine produced by us is in compliance with:

- **98/37/EEC Machinery Directive** (ex 89/392/EEC, as amended by the 91/368/EEC, 93/44/EEC and 93/68/EEC Directives).

The following Standards apply:

- EN 292-1 1991 Safety of machinery - Basic concepts and general principles for design. Basic terminology and methods.
- EN 292-2 1991 Safety of machinery. Basic concepts and general principles for design. Specifications and technical principles.
- EN 418 1994 Safety of machinery. Emergency stop devices, functional aspects - design principles.
- EN 983 1996 Safety requirements related to systems and components for hydraulis and pneumatic transmissions.
- EN 1037 1995 Safety of machinery. Isolation and energy dissipation. Prevention of unexpected start-up.
- EN 1088 1995 Safety of machinery - Interlocking devices with and without guard - locking. General principles and provisions for design.
- EN 60204-1 1998 Safety of machinery. Electrical equipment of machines. Part 1 : General requirements Sa
- EN 60204-2 1990 Electrical equipment of industrial machines. Part 2: Item designation and examples of Drwg.ings, diagrams, tables and instructions.

- **89/336/EEC Directive on electromagnetic compatibility**, as amended by the 92/31/EEC, 96/68/EEC, 93/97/EEC and 93/68/EEC

The following Standards apply:

- EN 50081-1 General Standard for emission levels
- EN 50082-1 General Standard for immunity

- **73/23/EEC Low Voltage Directive, as amended by the 93/68/EEC Directive**

4.2 DESCRIPTION OF THE MACHINE AND ITS COMPONENTS

The 225 cutting-off machine with circular blade for ferrous metals produced by MIVA is made from a solid casting, carefully processed . The upper surface, designed to allow the complete draining away of the cutting fluid, has been processed using precision machinery to allow the attachment of a sturdy vice with burr-proof jaws.

The bar-stop device allows the length required to be preset and a constant level of performance for repeated cuts.

The blade-holding head is firmly attached to a reduction unit in oil bath built onto the motor and to the base by means of a joint which provides 45° rotation to left and the cutting movement with manual feed.

The main switch is located above the motor block.

The control lever, fitted with an ergonomic hand-grip and blade activation button with safety release action, reduces fatigue during operation to a minimum.

The blade is protected by a guard which in its turn protects the operator from ejected shavings and coolant.

The machine is supplied with a set of service spanners.

4.3 INTENDED AND UNSUITABLE USES OF THE MACHINE

The 225 cutting-off machine with circular blade has been designed and built to cut bars, structural steel and ferrous metal pipes in accordance with the instructions contained in this manual.

Therefore, the cutting of other materials is not permitted: if the above recommendations are not observed, the machine could be damaged and the health and safety of the operator put at risk.

Cutting is not permitted, if the bar has not been first locked in the vice.

5. MAIN TECHNICAL DATA

Under no circumstances should the following data be altered, this is in order to protect the correct functioning of the machine and to avoid creating safety risks for the operator.

MOTOR	single-phase
Motor Power	single-phase KW 0,75
Motor revolutions (two speeds)	1400 rpm
CIRCULAR BLADE (SAW)	Number of teeth and feed holes according to table
Maximum diameter and thickness	Diameter: 225 mm Thickness: 2
BLADE REVOLUTIONS per minute	52 rpm
CUTTING ANGLE	45° right
PIECE LOCKING VICE: MAX OPENING	70 mm
COOLANT TANK CAPACITY	litres 1
MACHINE WEIGHT	Kg 32 - N 310

6. MACHINE INSTALLATION

A. MACHINE CHECK AND CONTROL LEVER ASSEMBLY

The machine should be checked to make sure that it has not been damaged during transportation and handling. Keep the machine in its normal position and avoid turning it upside down.

Control lever assembly (drawing 4 Encl. 2) : Fit the supplied head lever 22, into position 20 and fasten it by means of the nut 72. To fit the handle, connect the electric cable terminals 220 to the microswitch 218 and place it in the left second half of the handle as shown in draw. 3 Encl.2. Then insert the button 222 and the lever 22. Complete the assembly using the screws 221 and then 219. Make sure that the cable is inserted into the lever slot 22, after having checked that there are no burrs or sharp edges in the slot.

B. ASSEMBLY OF CIRCULAR BLADE

For the assembly of the circular blade, remove the screw No. 34 (Draw. 5 Encl. 2), keeping the motor-blade block raised and rotate the mobile guard 31 backwards. Unscrew the screw 29 counter clock wise, withdraw the flange 28, insert the circular blade, making sure that the toothing faces the same direction as the arrow on the mobile guard. Then refit flange 28 and screw 29.

C. ELECTRICAL CONNECTION TO THE MAINS

Install a differential thermomagnetic switch with characteristics suited to the mains.

Make sure that the power supply voltage corresponds to the voltage on the motor plate. Connect the cable to the power supply line observing the colour codes of the individual wires, pay particular attention to the earth wire. Connect the machine, make sure that the rotation of the circular blade is in the direction shown by the arrow on the guard.

D. CUTTING COOLANT

For the cooling of the circular blade, fill the tank with emulsible oil obtained from a mixture of water and AGIP ULEX 260 EP oil with a percentage of 5-7%

7. MACHINE START UP AND OPERATION

7.1 DEVICES AND THEIR LOCATION

(The location of the devices described is shown on the 225 installation plan Encl. 1)

Code 42	LOCKABLE MAIN SWITCH
Code 218	START-STOP MICROSWITCH: situated inside the handle located at the end of the control lever and has safety release action.
Code 59	CUTTING ANGLE DEVICE: to check that cutting inclination is as required
Code 9	LOCKING VICE
Code 65	BAR-STOP
Code 22	CONTROL LEVER WITH HANDLE

7.2 TOOLS SUPPLIED

1	Allen wrench size 3
1	Allen wrench size 4
1	Allen wrench size 5
1	Allen wrench size 6
1	Allen wrench size 14

7.3 OPERATION

CHECKS TO CARRY OUT BEFORE EACH CUT

- A. Make sure that the circular blade is fastened securely by means of screw 29 (DRAW.5 ENCL.2)
- B. Check that the hand indicates the required cutting angle (vice scale)
- C. Make sure that the head and vice are locked by means of the lever 52 (DRAW.6 ENCL.3)
- D. With the motor off, lower the head and check that at the end of the stroke, the circular blade does not touch the bench 2. If the circular blade does touch, adjust the screw 67 (DRAW.4 ENCL.2).
- E. Make sure that the piece to be cut is adequately secured in the vice.
- F. Make sure that the coolant is circulating in the machine.

CUTTING OPERATION

- A. Before each cutting operation, if the cutting inclination is not as required, correct or change the inclination by loosening the screw 52 (DRAW.6 ENCL.3) and after correction, securing the screw again.
- B. Clamp the piece to be cut by means of the handwheel 7, press the main switch 42, take hold of the handle 25 located at the end of the head lever and press button 218. The blade will now start turning.
- C. Position the blade carefully on the piece to be cut. Then increase the pressure in order to accelerate the cutting operation without using excessive force. To make a series of cuts, position the bar-stop 65 at the size required. Fix it into position by using the knob 66.
- D. To replace the circular blade carry out the same operations used to assemble the circular blade. (chapter 7c).
- E. For the choice of most suitable blade consult the table ENCL. 1.

We strongly discourage the use of blades with ruined or insufficiently sharp cutting edges

7.4 SPECIAL SAFETY CHECKS

A. Before using the machine, check carefully that the safety devices are in good working order, that the mobile parts are not blocked, that no parts are damaged and that all the components are installed correctly and are functioning properly.

B. Make sure, before operating the machine, that the screws of the guards and other protective devices are adequately secured, especially the screws on the circular blade guard and the rotation levers of the circular blade mobile guard.

C. Check that the safety microswitches are functioning correctly.

D. Make sure that the mobile guard does not leave uncovered an angle of more than 5° in order to prevent fingers from entering.

E. Pay attention to environmental conditions. Do not expose the machine to rain; to not use it in damp environments, position the machine on a clean dry floor that has no oil or grease stains.

F. Before using the machine, the operator should make sure that all tools and service spanners used for maintenance or adjustment have been removed.

7.5 GENERAL SAFETY RULES

A. Wear appropriate clothing. The operator's clothing should not be loose or dangling nor should it have parts which could easily get caught.

B. Avoid unstable operating positions. Find a safe and evenly balanced position to operate the machine.

C. Keep the work area tidy, untidiness increases the risk of accidents.

D. Do not use the power supply cable to disconnect the plug from the socket. Protect the cable from high temperatures, oil or sharp edges. For outdoor use, only use extension cables which are in line with current regulations.

7.6 MEASURES TO PREVENT RESIDUAL RISKS

A. The removal of guards and tampering with the safety devices is strictly forbidden.

B. Gloves should always be worn.

C. Standard work clothing should be used and kept closed and should not have flapping parts.

D. The machine should not be cleaned with liquids under pressure.

E. In the event of fire, extinguishers should not be used unless they are the powder type. The electric power supply to the machine should always be disconnected in these circumstances.

F. Do not insert foreign bodies into the motor cover and to not supply the machine with voltage by tampering with the safety microswitches or main switch.

G. Take the necessary precautions to avoid the machine being started by other people during loading, adjustment, piece changing or cleaning.

8. MAINTENANCE AND REPAIRS

8.1 GENERAL SAFETY MEASURES

A. Before carrying out any work on electrical equipment, remove the power supply plug from the control panel (disconnect voltage).

B. Only use cables to supply power, which have a cross-section suited to the power of the machine.

C. Repairs should only be carried out by authorized personnel. Only spare parts made by the original manufacturer should be used, otherwise these could cause damage or injury.

8.2 ROUTINE CHECKS AND MAINTENANCE

FREQUENCY (working hours)	OPERATION
1000 hours	Replace the oil in the gear box with AGIP ACER 320 oil (0.2 litres) or equivalent.
1000	Lubrication of mobile parts in the piece locking vice (GREASE AGIP MU 2)
50	Cleaning of the coolant tank and filter check

8.3 DESCRIPTION OF ROUTINE MAINTENANCE

A. Replacement of gear box oil

Remove caps 38 and 19 (draw.6 Encl.3), let all the used oil flow out into a container which should have a label indicating the contents for the purposes of disposal. Replace cap 19. Feed 0.2 litres of oil (as specified above) into the oil feed hole located on the upper part of the gear box and then replace cap 38.

B. Lubrication of mobile parts of piece locking vice

Clean and grease the parts worked by the bench 2, the vice 9 and the vice screw 6.

C. Cleaning of the coolant tank: Filter check.

Empty the coolant from the tank by means of the tap located on the rear part of the machine bench (after moving the liquid feed pipe away from this). Collect the coolant in a container for future disposal. Clean out the shavings and the metallic powder, taking care not to scatter this over the machine especially around the motor and the box containing the electrical equipment. Reconnect the pipe, check filter 44 and if necessary replace it. Fill the tank with the amount and liquid stated previously.

9. INFORMATION REGARDING ENVIRONMENTAL NOISE

An environmental noise test carried out on the 225 cutting-off machine with circular blade, identical to the machine to which these operation instructions refer, has given the following results:

ACOUSTIC RADIATION PRESSURE


1. $L_{Aeq} = 84.2 \text{ dB (A)}$
2. $L_{peak} = 90.6 \text{ dB}$ (the maximum acceptable value is 140 dB).
3. The level of background noise has no influence = 48.5-54.2 dB (A)

10. LIST OF SPARE PARTS

POS.	DESCRIPTION	CODE	POS.	DESCRIPTION	CODE
1			46	Bearing	
2	Bench	002/25	47	Worm screw	009/25
3			48	Self-locking ring nut M16x1DIN 981	
4	Pin 8x26 DIN 6325		49	Water pipe	
5			50	HSHC screw M4x6 DIN 912	
6	Vice screw	012/25	51	Pump carrier braket	018/25
7	Vice handwheel	014/25	52	HH screw M10x40 DIN 933	
8	Head carrying arm	004/25	53	Washer D.10 DIN 125/A	
9	Vice jaw	013/25	54	Dowel 6x10 DIN 914	
10	Dowel M8x10 DIN 915		55	Rotor shaft	
11	Vice cover	015/25	56	Stator	
12	HSHC screw M5x8 DIN 912		57	Head pin	032/25
13	HSHC screw M6x20 DIN 912		58	HH screw M6x16 DIN 933	
14	Bush	027/25	59	Graduated sector	023/25
15	Belleville washer 16x8,2x1,2 DIN2093		60	Splash guard 25-35-7	046/25
16	Pump pushing stud	020/25	61	Stopper	024/25
17	Pump stud braket	019/25	62	Head gear	035/25
18	O- Ring 3100	045/25	63	Nut M 16 DIN 934	
19	Oil level plug 3/8"		64	Bar stopper rod	031/05
20	Head	006/25	65	Bar stopper	037/25
21	Spacer	044/25	66	Bar stopper knob	077/25
22	Head lever	039-A/05	67	HH screw M6x30 DIN 933	
23	Helical gear	010/25	68	Pump	022/25
24	Pin 6x40 DIN 1		69	Rear guard	028/25
25	Head lever handle	046/05	70	Nut M8 DIN 934	
26	Disk shaft	011/25	71	Nut M6 DIN 934	
27	Disk		72	Nut M14 DIN936	
28	Disk flange	017/05	73	Motor casing	
29	Disk fastening screw	029/25	74	Motor flange	
30	Disk guard	007/25	75	Snap ring	
31	Disk movable guard	008/25	76	Nut M6 DIN 934	
32	Snap ring D.45 E DIN 471		77	Pring pin 6x16 DIN1481	
33	HSHC screw M6x16 DIN 912				
34	HSHC screw M6x16 DIN 912				
35	Disk movable guard movable rod	026/25			
36	Disk movable guard fixed rod	025/25			
37	HSHC screw M6x16 DIN 912				
38	Oil filling cap 3/8"				
39	Key 5x5x30 DIN 6885		218	Micro switch of handle	028/90
40	Dowel M8x35 DIN 914		219	HSFHC screw M4x8 DIN7991	
41	Switch box		220	Electrical cable 2x1	
42	Switch		221	RH screw M2,9x13 DIN7981	
43	Motor	001/80	222	Button	
44	Filter	042/25			
45	Splash				

Scelta delle seghe - Blade selection
Choix des Fraises scie - Wahl der Sageblätter


Diametro - Diameter Diamètre - Durchmesser		200	225	250	275	300	315	350
Spessore - Thickness Epaisseur - Dicke		1,8	1,8	2	2,5	2,5	2,5	3
b= 10 - 80 g = ≤ 2	t	3	3	3	3	3	3	3
	z	200	230	250	280	300	320	350
b= 10 - 80 g= 2- 4 d=10 - 18	t	5	5	5	5	5	5	5
	z	130	140	160	170	190	200	220
b= 20 - 80 g= 4-10 d=18 - 30	t	8	8	8	8	8	8	8
	z	80	90	100	110	120	120	140
d= 30- 40	t	10	10	10	10	10	10	10
	z	60	70	80	90	90	100	110
d>40	t	//	//	//	12	12	12	12
	z	//	//	//	70	80	80	90

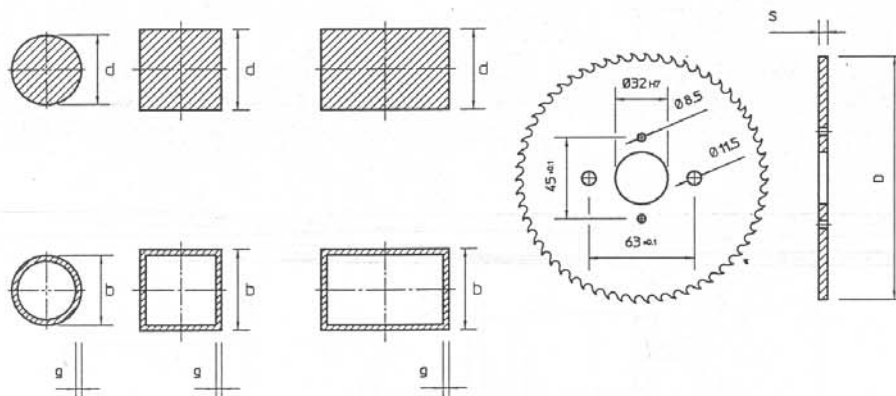


Si garantisce il funzionamento ottimale della vite-corona utilizzando seghe con fori di trascinamento.
 Best performance of worm screw worm wheel gearing is guaranteed when circular saw blades with drawing-holes are used
 Nous garantissons le bon fonctionnement de la vis et couronne seulement si l'on emploie des fraise-scies avec trous d'entraînement.
 Die Verwendung von Sageblättern mit Mitnehmerlochern sichern den guten Betrieb der Schnecke und des Scheckenkranzes.

b= diametro esterno/altezza (tubi) – outside diameter/height (pipe)
 diamètre extérieur/hauteur (tube) – aussendurchmesser/hohe (rohr)
 d= diametro/altezza (pieni) – diameter/height (solid)
 diamètre/hauteur (plein) – durchmesser/hohe (voll)
 g= spessore del tubo – pipe thickness
 épaisseur du tube – rohrdicke
 t= passo dentatura – toothing pitch
 pas denture – entfernung verzahnung
 z= numero di denti – number of teeth

ALLEGATO - 1 -

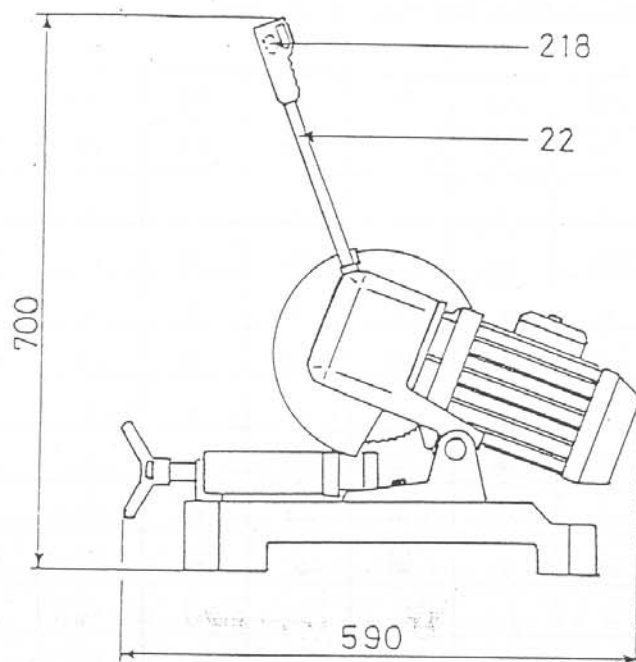

DIS. 1

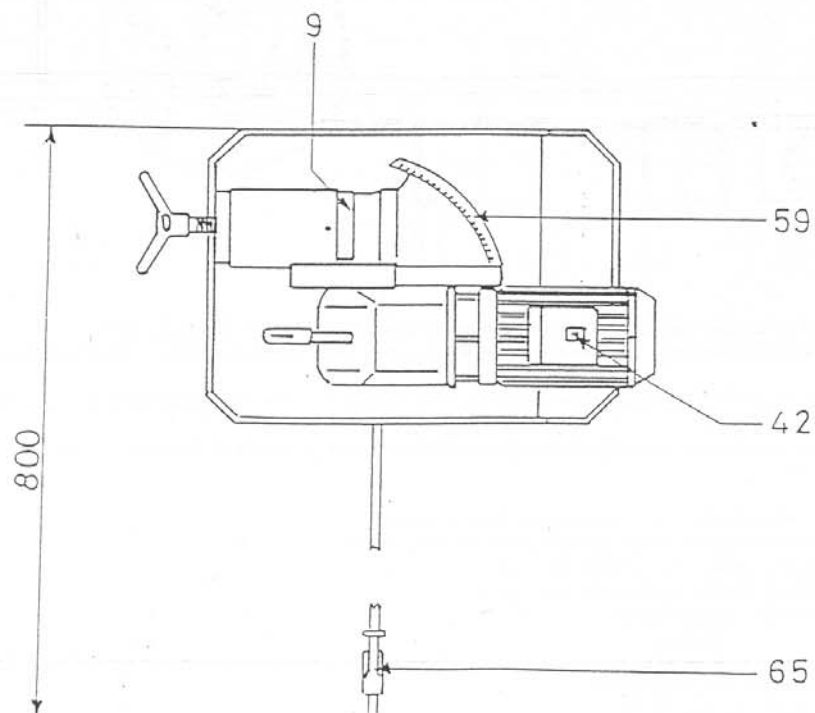

INSTALLARE UN INTERRUTTORE MAGNETOTERMICO
DIFFERENZIALE CON CARATTERISTICHE ADEGUATE
ALLA LINEA DI ALIMENTAZIONE.

INSTALL A DIFFERENTIAL THERMOMAGNETIC SWITCH
WITH CHARACTERISTICS SUITED TO THE MAINS.



INSTALLER UN INTERRUPTEUR MAGNETOTHERMIQUE
DIFFERENTIEL AYANT LES CARACTERISTIQUES
REQUISES PAS LA LIGNE D'ALIMENTATION.

EINEN DEN EIGENSCHAFTEN DER VERSORGUNGSLINIE
ENTSPRECHENDEN MAGNETOTHERMISCHEN
DIFFERENZIALSCHALTER ANBRINGEN.

INSTALAR UN INTERRUPTOR MAGNETOTERMICO
DIFERENCIAL CON CARACTERISTICAS ADECUADAS
A LA LINEA DE ALIMENTACION.



225 1F 0,7KW A4,9


DIS. 2

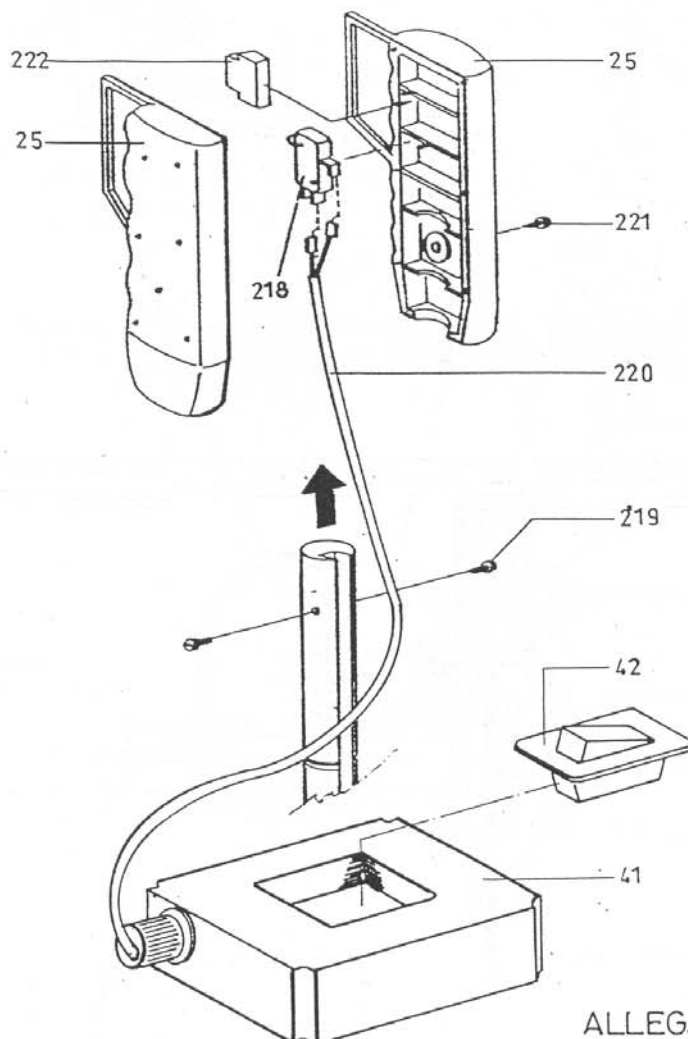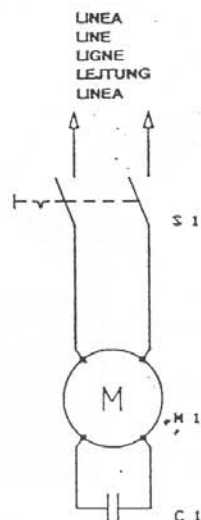

DIS. 3

ALLEGATO - 2 -

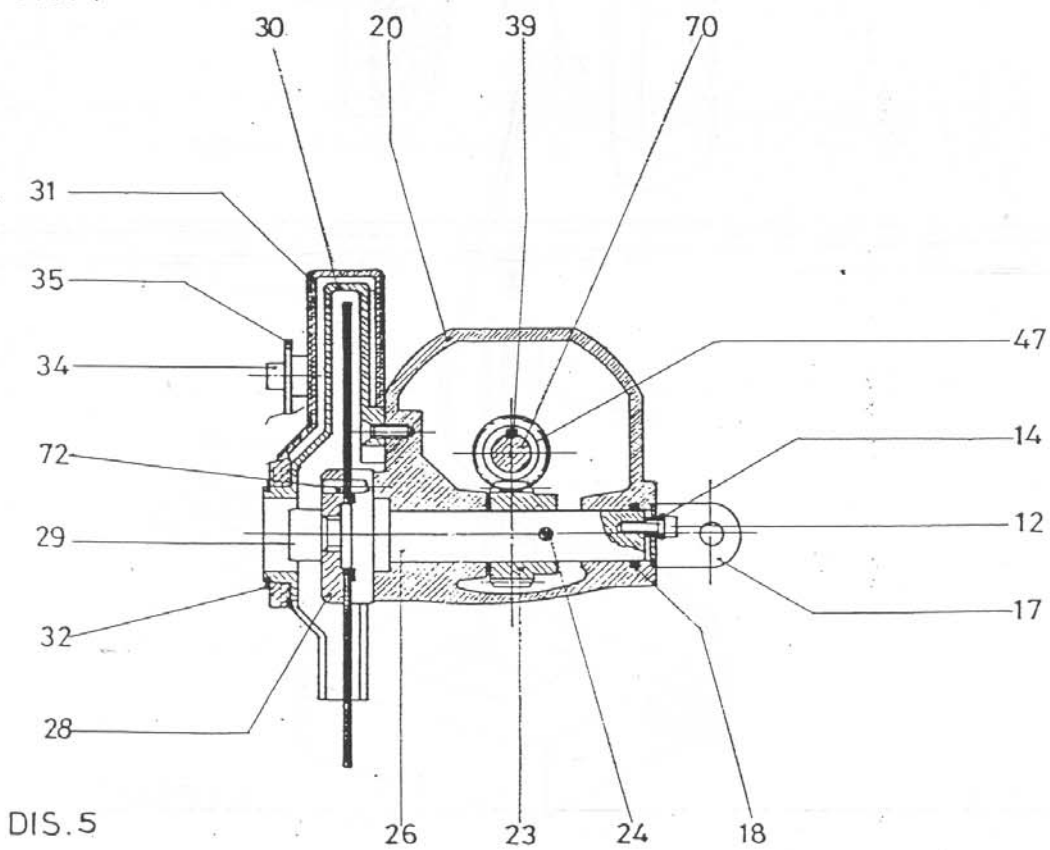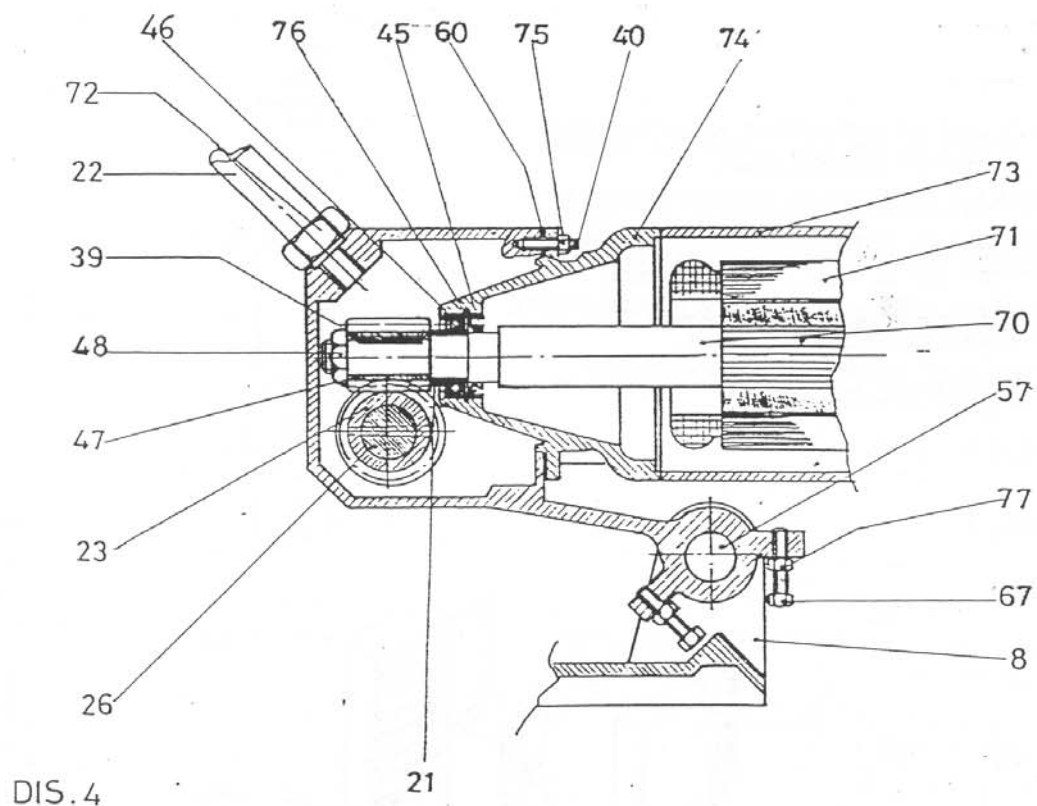

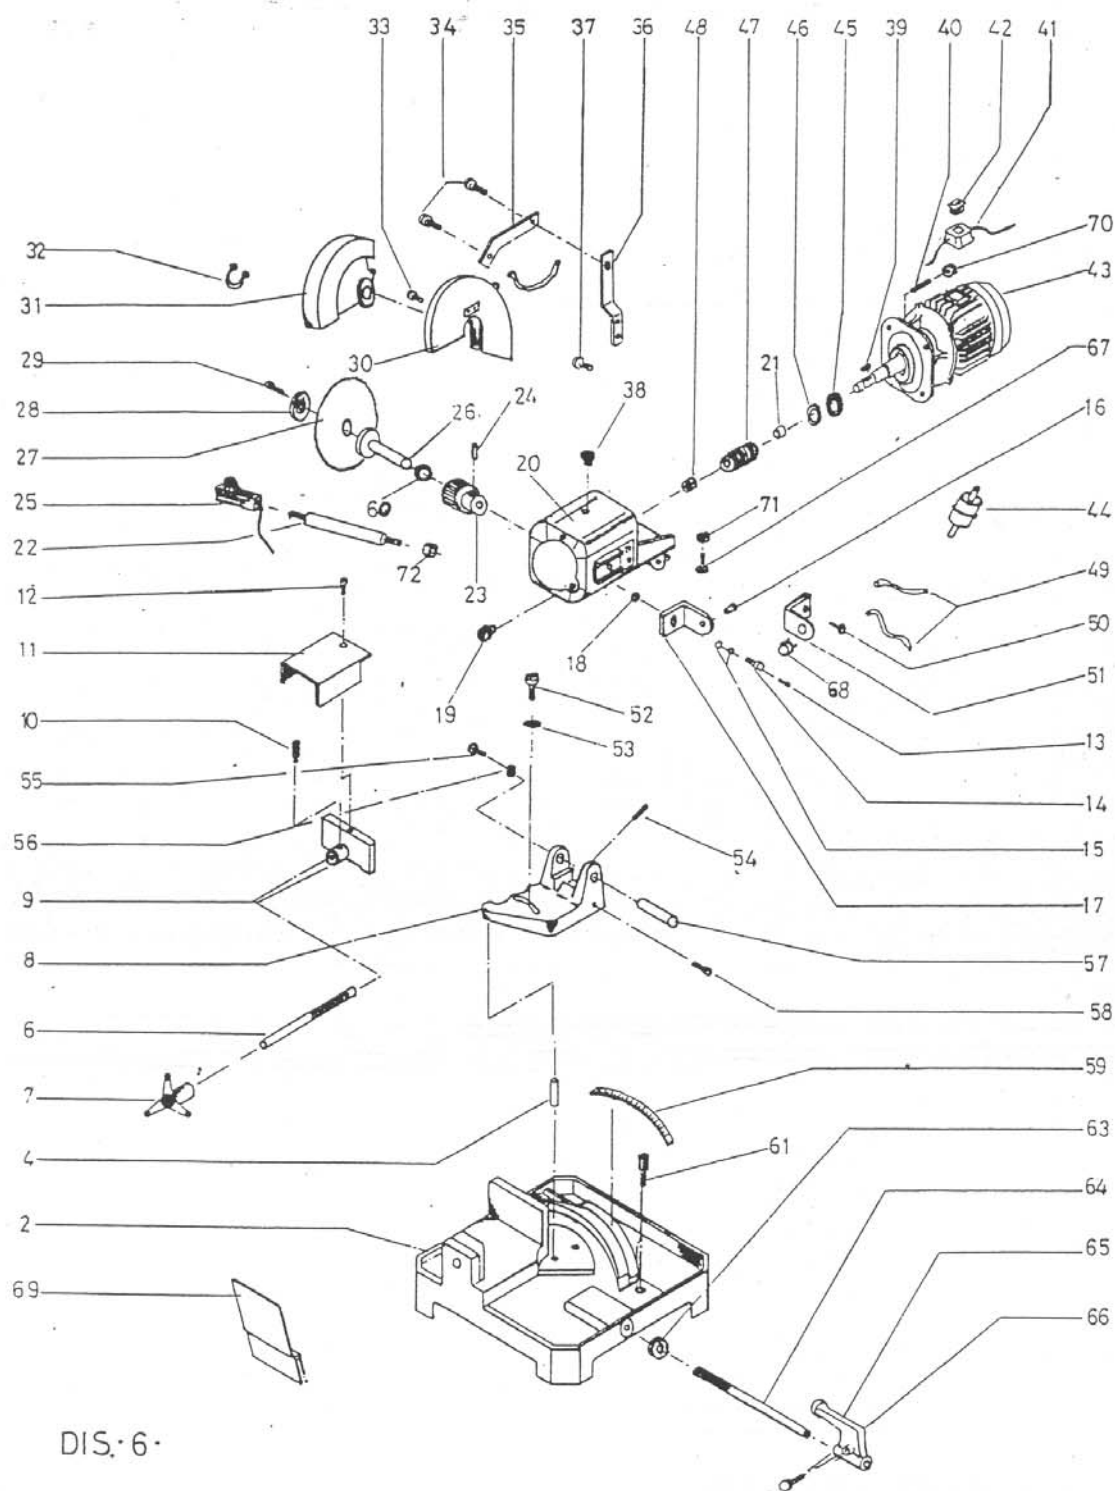

DIS. 6

ALLEGATO 3